



HUNTING BLIND

Assembly Instructions



BLIND Assembly Instructions




SAFETY

At no time shall 8 Point Hunting Blinds be liable for any accidents due to falls from the hunting blind. We recommend that you follow standard safety procedures while assembling and when entering and exiting the blind, such as the use of safety harnesses, climbing ropes, etc. Safe assembly requires two people.

Layout the included pieces of your 8-Point Hunting Blind stand kit. If you purchased a tower stand kit, please assemble that first.

1

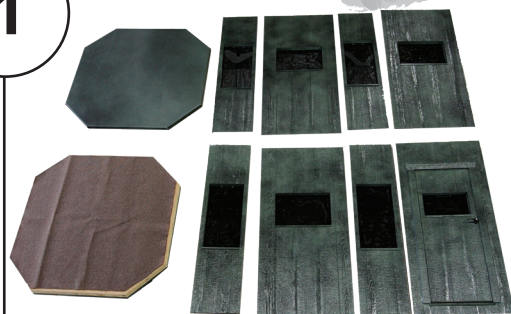


2



Install the carpet to top of base. You can use any flush face screw - short drywall screws work great. Fasten the carpet in several spots to hold it in place.

3

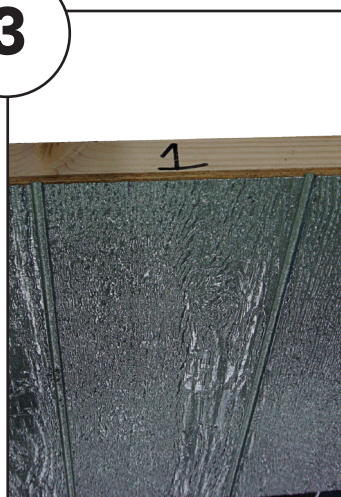

There are numbers on the tops of each panel so you know which order to install them to the base.

4



Apply caulk to the bottom of panel 1 before attaching panel 1 onto the base.

5



Apply caulk to the side of panel 1 before attaching to panel 2.

6



Match up panel 1 and 2 to be sure they are flush before you screw the panels together and before attaching panel 2 to the base.



7



Attach panel 1 to panel 2 and screw them together with large screws. The panels should already have caulk between them and they should be flush at the top before you screw them together.

8



Apply the caulk to the side of panel 2 and add panel 3 to panel 2 making sure they are flush before using screws to permanently attach them together. Continue with all the panels except the last two.

9



Lift the roof on to the top of the unit and balance on top of the remaining panels. this step requires two people.

10



Keep the roof on the top until all panels are assembled. Use two people so it balances correctly.

11



Add the remaining two panels. Remember to use caulk before using screws to secure the panels on the sides and bottoms.

12



Secure the roof onto the top of the unit.



13



Use a sand bag weight for easy opening and closing of windows.

